

# DATA SHEET: WALL PACK GEN-2 (PT-MWP05)

The PATRIOT LED Generation-2 Wall Pack lights are durable and dependable outdoor lights. Ideally the perfect choice for enhancing building exteriors or used as perimeter lighting to enhance heightened security.


Our LED Wall Pack Generation-2 are backed with our industry-leading more than 100,000-hour rated lamp life and 10-year warranty. See Ordering Model table below for our BAA compliant products. Contact us for pricing or more information.

### PRODUCT BENEFITS

- Sealed die-casting profile for indoor and outdoor applications.
- Voltage is 100-277V.
- Lumen output 3200-4100lm.
- Polycarbonate optical lens with UV stabilizers.
- Photocell optional.
- Replacing 100W MH.
- Operating temperature is -40 °C to 40 °C (-40 °F to 104 °F).
- UL/cUL wet location and DLC qualified.
- Limited Warranty: 5 years (10yrs optional).
- Long life LEDs lasting up to 100,000hours.




### BEAM ANGLE



Patriot LED Light Distribution

### CAN DECREASE ENERGY USAGE BY



vs. Similar Fluorescent Lamps

### WARRANTY



Our Industry-Leading 10-Year Limited Warranty Guarantees Unsurpassed Quality

### APPLICATIONS

- Facade.
- Wall Washing.
- Landscape lighting.
- Poster board lighting.
- Building lighting.



### ORDERING MODEL

FIXTURE TYPE	WATTAGE	VOLTAGE	CCT	FINISH	PHOTOCELL (OPTION)
PT-MWP05 = Wall Pack Series	25W 25W 30W 30W	27V = 120-277V	40K 4000K 50K 5000K	D = Dark Bronze B = Black W = White	P1 120V Photocell P0 120-277V Photocell Blank Without Photocell
Product Code: Example					
Example: PT-MWP05 30W 27V 50K Y Y					

## PRODUCT SPECIFICATION

Product No.	BAA/TAA Option*	Watts	VOLTAGE	4000K (70CRI)		5000K(70CRI)	
				Lumens	LPW	Lumens	LPW
PT-MWP05 25W 27V 50K Y Y	Yes	25W	120-277VAC	3200lm	128lm/w	3200lm	128 lm/w
PT-MWP05 30W 27V 50K Y Y	Yes	30W	120-277VAC	4000lm	133 lm/w	4100lm	137lm/w


## ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	VOLTAGE	CURRENT (Amps)
1	390	25	120	0.21
		25	208	0.12
		25	240	0.10
		25	277	0.09
1	800	30	120	0.25
		30	208	0.14
		30	240	0.13
		30	277	0.11



## DIMENSION

unit: inch/mm

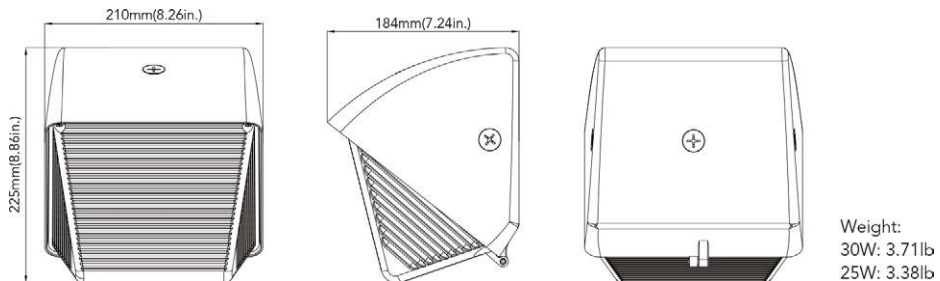

## PHOTOMETRICS

PT-MWP0530W27V50KD

Luminous Intensity Distribution Curve

