

DATA SHEET: PATRIOT LED GEN.2 WALL MOUNT

PRODUCT DESCRIPTION

LED WALL MOUNT LIGHT is ideal for quickly and easily illuminating any outdoor space while dramatically reducing energy consumption.


Our PATRIOT LED GENERATION-2 WALL MOUNT lights are backed with our industry-leading 100,000-hour rated lamp life and 10-year warranty. See Ordering Model table below for our BAA compliant products. Contact us for pricing or more information.

PRODUCT BENEFITS

- Sealed die-casting profile for outdoor applications.
- Consumes 17W to replace 120W Incandescent 25W to replace 50W HID.
- Lumen output from 1600-2600lm.
- Polycarbonate optical lens with UV stabilizers for choosing.
- Built-in UL class 2 driver, and 120V/277V photocell.
- UL/cUL listed and DLC qualified.
- Long life LEDs lasting up to 100,000 hours.
- Limited Warranty: 5 year (10yrs optional).




BEAM ANGLE



Patriot LED Light Distribution

CAN DECREASE ENERGY USAGE BY



vs. Similar Fluorescent Lamps

WARRANTY



Our Industry-Leading 10-Year Limited Warranty Guarantees Unsurpassed Quality

APPLICATIONS

- Security.
- Entry ways.
- Stairways.
- Storage and perimeter areas.
- Residential exteriors.



ORDERING MODEL

FIXTURE TYPE	WATTAGE	INPUT VOLTAGE	CCT	FINISH	SENSOR (OPTION)	LENS
WM = Wall Mount	17W=17Watts 25W=25Watts	27V 120-277V	30K 3000K 40K 4000K 50K 5000K	D = Dark Bronze B = Black W = White	P1 = 120V Photocell P2 = 277V Photocell Blank = Without Photocell	F = Frosted Lens Blank = Clear Lens
Product Code: Example						
Example: PT-WM17W27V40KDP1F						


PRODUCT SPECIFICATION

Product No.	BAA/TAA Option*	Rated Wattage	Luminaire Shape	Input Voltage	CCT	Initial Lumens (lm)	Luminaire Efficacy (lpw)	Rated life (hours)	CRI	Power Factor	Dimmable	Photocell
PT-WM17W27V30KD	Yes	17W	Wall Mount	120-277V	3000	1600	94	100,000 hours	82	0.9	NO	NO
PT-WM17W27V30KDP1	Yes	17W	Wall Mount	120V	3000	1600	94	100,000 hours	82	0.9	NO	YES
PT-WM17W27V30KDP2	Yes	17W	Wall Mount	277	3000	1600	94	100,000 hours	82	0.9	NO	YES
PT-WM17W27V40KD	Yes	17W	Wall Mount	120-277V	4000	1650	97	100,000 hours	82	0.9	NO	NO
PT-WM17W27V40KDP1	Yes	17W	Wall Mount	120V	4000	1650	97	100,000 hours	82	0.9	NO	YES
PT-WM17W27V40KDP2	Yes	17W	Wall Mount	277	4000	1650	97	100,000 hours	82	0.9	NO	YES
PT-WM17W27V50KD	Yes	17W	Wall Mount	120-277V	5000	1700	100	100,000 hours	82	0.9	NO	NO
PT-WM17W27V50KDP1	Yes	17W	Wall Mount	120V	5000	1700	100	100,000 hours	82	0.9	NO	YES
PT-WM17W27V50KDP2	Yes	17W	Wall Mount	277	5000	1700	100	100,000 hours	82	0.9	NO	YES
PT-WM25W27V30KD	Yes	25W	Wall Mount	120-277V	3000	1900	76	100,000 hours	82	0.9	NO	NO
PT-WM25W27V30KDP1	Yes	25W	Wall Mount	120V	3000	1900	76	100,000 hours	82	0.9	NO	YES
PT-WM25W27V30KDP2	Yes	25W	Wall Mount	277	3000	1900	76	100,000 hours	82	0.9	NO	YES
PT-WM25W27V40KD	Yes	25W	Wall Mount	120-277V	4000	2500	100	100,000 hours	70	0.9	NO	NO
PT-WM25W27V40KDP1	Yes	25W	Wall Mount	120V	4000	2500	100	100,000 hours	70	0.9	NO	YES
PT-WM25W27V40KDP2	Yes	25W	Wall Mount	277	4000	2500	100	100,000 hours	70	0.9	NO	YES
PT-WM25W27V50KD	Yes	25W	Wall Mount	120-277V	5000	2600	104	100,000 hours	70	0.9	NO	NO
PT-WM25W27V50KDP1	Yes	25W	Wall Mount	120V	5000	2600	104	100,000 hours	70	0.9	NO	YES
PT-WM25W27V50KDP2	Yes	25W	Wall Mount	277	5000	2600	104	100,000 hours	70	0.9	NO	YES
PT-WM17W27V30KDF	Yes	17W	Wall Mount	120-277V	3000	1900	112	100,000 hours	70	0.9	NO	NO
PT-WM17W27V30KDP1F	Yes	17W	Wall Mount	120V	3000	1900	112	100,000 hours	70	0.9	NO	YES
PT-WM17W27V30KDP2F	Yes	17W	Wall Mount	277	3000	1900	112	100,000 hours	70	0.9	NO	YES
PT-WM17W27V40KDF	Yes	17W	Wall Mount	120-277V	4000	2000	118	100,000 hours	70	0.9	NO	NO
PT-WM17W27V40KDP1F	Yes	17W	Wall Mount	120V	4000	2000	118	100,000 hours	70	0.9	NO	YES
PT-WM17W27V40KDP2F	Yes	17W	Wall Mount	277	4000	2000	118	100,000 hours	70	0.9	NO	YES
PT-WM17W27V50KDF	Yes	17W	Wall Mount	120-277V	5000	2000	118	100,000 hours	70	0.9	NO	NO
PT-WM17W27V50KDP1F	Yes	17W	Wall Mount	120V	5000	2000	118	100,000 hours	70	0.9	NO	YES
PT-WM17W27V50KDP2F	Yes	17W	Wall Mount	277	5000	2000	118	100,000 hours	70	0.9	NO	YES
PT-WM25W27V30KDF	Yes	25W	Wall Mount	120-277V	3000	2600	104	100,000 hours	70	0.9	NO	NO
PT-WM25W27V30KDP1F	Yes	25W	Wall Mount	120V	3000	2600	104	100,000 hours	70	0.9	NO	YES
PT-WM25W27V30KDP2F	Yes	25W	Wall Mount	277	3000	2600	104	100,000 hours	70	0.9	NO	YES
PT-WM25W27V40KDF	Yes	25W	Wall Mount	120-277V	4000	2700	108	100,000 hours	70	0.9	NO	NO
PT-WM25W27V40KDP1F	Yes	25W	Wall Mount	120V	4000	2700	108	100,000 hours	70	0.9	NO	YES
PT-WM25W27V40KDP2F	Yes	25W	Wall Mount	277	4000	2700	108	100,000 hours	70	0.9	NO	YES
PT-WM25W27V50KDF	Yes	25W	Wall Mount	120-277V	5000	2700	108	100,000 hours	70	0.9	NO	NO
PT-WM25W27V50KDP1F	Yes	25W	Wall Mount	120V	5000	2700	108	100,000 hours	70	0.9	NO	YES
PT-WM25W27V50KDP2F	Yes	25W	Wall Mount	277	5000	2700	108	100,000 hours	70	0.9	NO	YES

Note: D* Dark Bronze finish color is inventory color, please consult factory for lead time if other color is needed.

DIMENSION


unit: inch/mm

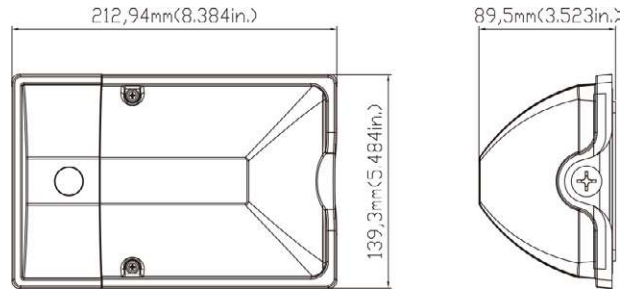


PHOTOMETRICS

PT-WM17W27V40KD

Luminous Intensity Distribution Curve




Illuminance at a Distance




PT-WM25W27V40KD

Luminous Intensity Distribution Curve

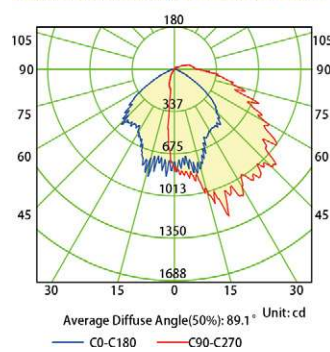


Illuminance at a Distance




PT-WM17W27V50KYFF

Luminous Intensity Distribution Curve




Illuminance at a Distance



PT-WM25W27V50KYFF

Luminous Intensity Distribution Curve



Illuminance at a Distance

