

DATA SHEET: DUSK TO DAWN (PT-MDD01) COB

Features

- Suitable for WET location/Outdoor.
- Voltage is 120-277V and replacing 100W MH and 175W MH.
- Outstanding thermal solution allows for usage in commercial application.
- Available in durable polyester dark bronze or silver grey powder coat powder coat.
- Built-in UL class 2 driver, optional for photocell.
- Optional steel powder coated arm.
- Operating temperature is -40°C to 45°C (-40°F to 113°F).
- UL/cUL listed and DLC qualified.
- Warranty 5 year (10 year optional).
- Rated Life : 100,000 hrs.



Applications:


Backyards, service road and effective for security and perimeter lighting



ORDERING GUIDE

Example: PT-ST 45W 27V XXK A Y Y

Fixture Type	Wattage	Voltage	CCT	Series	Finish	Photocell (Option)
PT-ST Street Light	45 45W	27V 120-277V	40K 4000K	A A Series	D Dark Bronze	PO 120-277V Photocell
	70 70W		50K 5000K		B Black	Blank Without Photocell
	80 80W				W White	
					SG Silver gray	

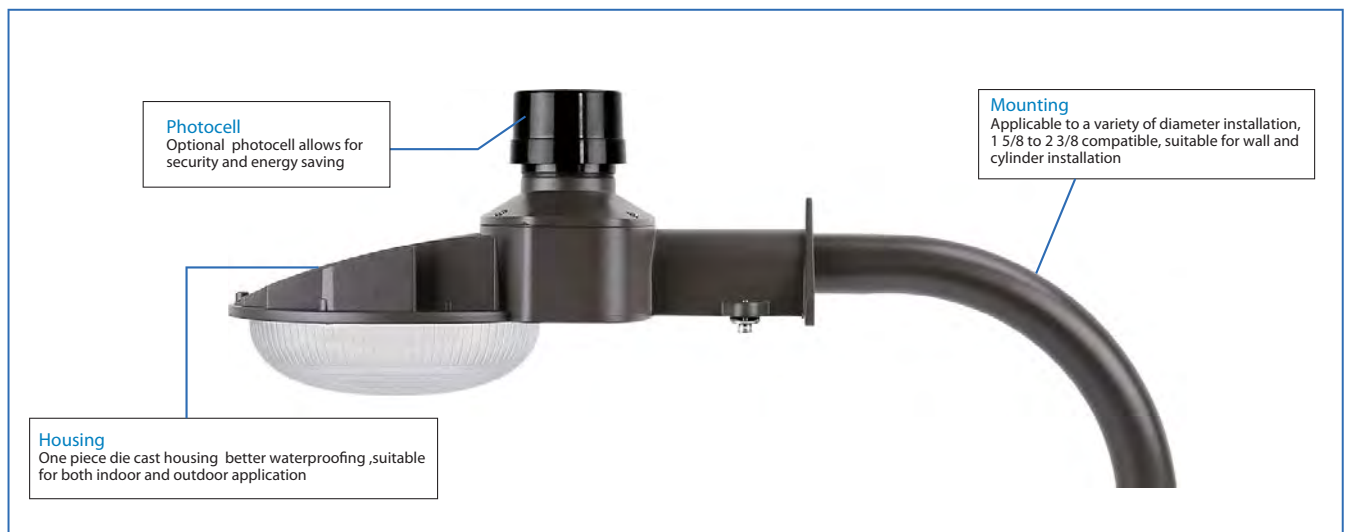

MESTER LED LIMITED

3rd F, Section B, Building A, Sunshine Industrial Park,
Hezhou, Xixiang, Bao'an District, Shenzhen China.

P: +86 755 28173385

Email: sales@szmester.com