


LED EXPLOSION PROOF EXIT

Explosion Proof Outdoor LED Luminaire (T SERIES)

This LED Explosion Proof Exit Sign is an ideal emergency exit marking solution for hazardous locations where failsafe reliability is a must.



DIMENSIONS

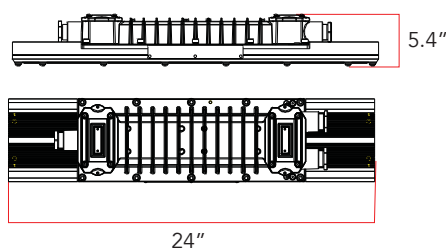

CERTIFICATIONS & RATINGS



- NEMA 4X, IP66
 - UL1598/UL1589A/UL844
 - CSA C22.2 No. 137/No.250.0
 - IECEx
 - ATEX
 - L70
- Class I, Division 2, Groups A,B,C,D
Class I, Division 2, Groups F,G
Class III

FEATURES

- Good heat dissipation
- Shock and vibration resistant tempered glass
- Cable Entries: 2XNPT 3/4" (M25 optional)
- Use in hazardous application
- High strength aluminum alloy housing
- IP66 Rated
- Limited Warranty: 5 year (10 year optional)
- Insulation Class I
- Surge protection 5KV

COMMON TECHNICAL DATA

Color	RED
Permissible Ambient Temperature	-40°C±45°C
Input Voltage	AC100-277V
Input Frequency	50/60Hz
Power	36W,48W
Rated Life	150,000 hrs
Enclosure Material	Copper free aluminum alloy

PRODUCT SPECIFICATION

Product Number	Wattage	Color Temperature	Voltage	Working Hrs	Lumens	CRI
PT-36W 2FT	36	2700K-6400K	AC100-277V	150,000 Hrs	4500	70
PT-48W 2FT	48	2700K-6400K	AC100-277V	150,000 Hrs	6000	70

ORDERING GUIDE

PT	36W/48W	2FT	Orange (RAL2011)
Company Code	Wattage	Length	Color