

# DATA SHEET: EMERGENCY EXIT SIGN (EX-827, COMBO)

## PRODUCT FEATURES




- LED Type: SMD LED.
- Battery Type: Ni-cd.
- Working Time: 90 minutes.
- Charging Time: 15-24 Hours.
- Limited Warranty: 5 year (10yrs optional).

## TECHNICAL DATA

- Injection-molded thermoplastic ABS housing.
- UL 94V-0 flame rating, fire-retardant.
- Wall, and ceiling mounting.
- Input Voltage: 120/277VAC 60HZ.
- 2X1W lamps for emergency mode.
- Nickel Cadmium Battery.
- Test switch and charge indicator light.
- Overcharge & Over-discharge protection.
- Backup time: ≥ 90minutes.
- Conversion time: <0.2second.
- IP Class: IP20.
- Insulation:1,Range: 80m<sup>2</sup>.
- Operating Temperature: 0°C~40°C.



Technical Drawing

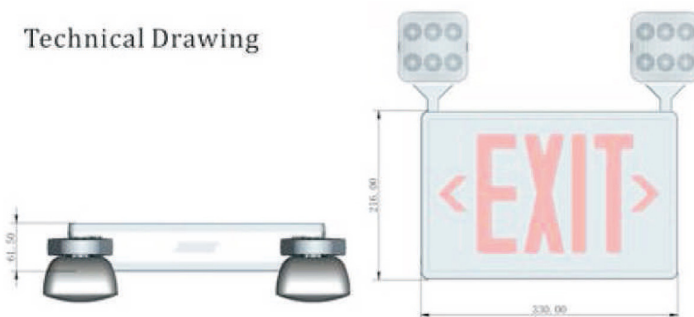

## WARRANTY



Our Industry-Leading 10-Year Limited Warranty Guarantees Unsurpassed Quality



CR-7027AG

## PRODUCT SPECIFICATION

| Product No.                                | BAA/TAA Option | Rated Lamp Wattage | Lamp Type | Input Voltage | Frequency | Discharge  |
|--|----------------|--------------------|-----------|---------------|-----------|------------|
| <b>EMERGENCY EXIT SIGN (EX-827, COMBO)</b> |                |                    |           |               |           |            |
| PT-EXIT-827                                | Yes            | 3.5W               | 2x1W LED  | 120/277VAC    | 60Hz      | 90 minutes |

